


# PROBE LOCKER DIGEST

## SIX TIER LOCKER: STANDARD DUTY



MEETS  
BS 4680:1996

# 6t

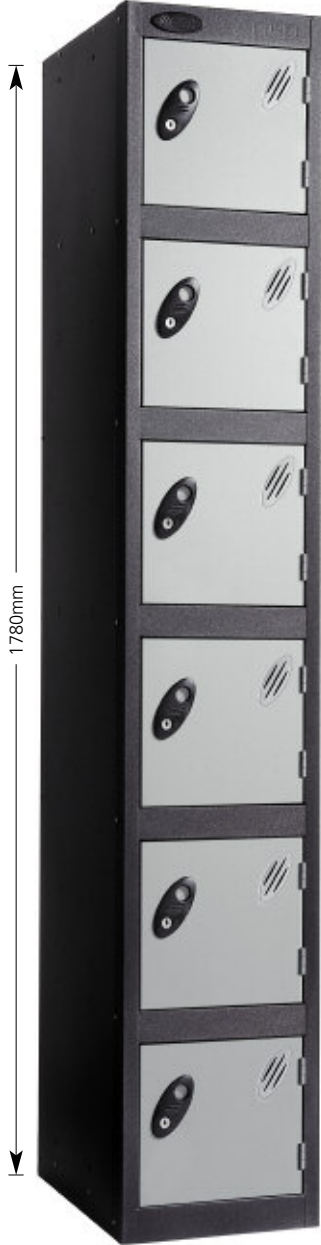

**NOMINAL CLEAR ENTRY**  
245mm  
see table, right, for widths

**PICTURED**  
Door style: Plain vented  
Lock type: Probe standard cam lock  
Colour: Silver door / Black body

### DOOR STYLE OPTIONS

DOOR WIDTHS	241	316	396
PLAIN VENTED	✓	✓	✓
PERFORATED	✓	✓	✓
TRESPA SOLID LAMINATE			
LAMINATE FACED	✓	✓	✓
CLEAR*	✓		

\*Cam Lock and Hasp and Staple locks only

### MATERIAL

SIDES	0.7 mm
BACKS	0.7 mm
TOPS	0.7 mm
BASE	0.7 mm
FRONT FRAME	0.9 mm
DOORS	0.9 mm

### MAIN PROBE LOCKER FEATURES

WELDED FRONT FRAME	✓
WELDED PLINTHS BETWEEN COMPARTMENTS	✓
THROUGH FRAME LOCKING SYSTEM	✓
THREE KNUCKLE HINGES	✓

### LOCKING OPTIONS

CAM LOCK	✓
HASP AND STAPLE LOCK	✓
RADIAL PIN LOCK	✓
COMBINATION LOCK	✓
COIN / TOKEN RETAIN	
COIN / TOKEN RETURN	✓
THREE POINT LOCKING	
ELECTRONIC LOCK*	✓
RE-PROGRAMMABLE COMBINATION LOCK*✓✓	*Not available on locker size 1780 x 380 x 380

### LOCKER WEIGHTS - single and nested


H	W	D	SINGLE WT KG	NEST 2 WT KG	NEST 3 WT KG
1780	305	305	24	45	66
1780	305	380	27	50	73
1780	305	460	30	55	80
1780	380	380	31	58	85

### AVAILABLE COLOURS

	DOORS	BODY
RED	✓	
BLUE	✓	
YELLOW	✓	
GREEN	✓	
SMOKE WHITE	✓	✓
SILVER	✓	✓
BLACK		✓

### NOMINAL CLEAR ENTRY WIDTHS

Clear entry width = locker width minus 64mm.

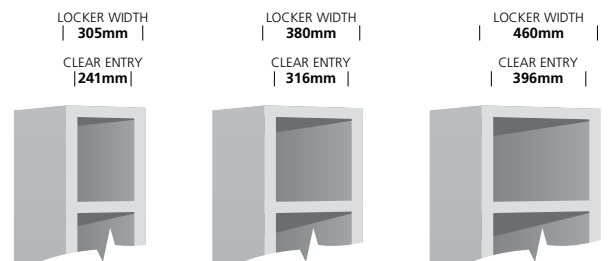

### QUALITY ASSURANCE



Probe Lockers are designed and manufactured in the UK, conforming to **BS 4680:1996** 'Standard Duty' (excluding size specification), **ISO 9001:2000** and **Environmental Management System ISO 14001:2004**